



Trellex FLEXOPIPE®
... flexible, unique, ecological!





Enclosed material transport

Conveyor belt systems of enclosed material transport are an excellent solution to various conveying problems. Metso Minerals Trellex is Europe's leading and most experienced manufacturer of belts for enclosed conveyor systems. Worldwide the belts are known under the trademark FLEXOPIPE®.

Remarkable advantages of enclosed material transport compared to conventional troughed belt conveyors :


- Horizontal and vertical curves enable the routing over difficult terrain conditions.
- Fewer transfer points lead to smooth treatment of the material to be conveyed and reduces installation- as well as operating costs.
- The narrow width of the installations needs less space requirements on the track.
- Larger contact between material and belt allows increased angles of inclination (depending on the kind of material being conveyed).
- Material is completely enclosed, external environmental conditions such as rain, wind, temperature and dust have no negative influences.
- Clean and spillage free material transport protects the environment and keeps maintenance costs on a low level.



THE PRINCIPLE

In the loading area the FLEXOPIPE® belt is troughed like conventional belts. After loading special idlers form the belt into a pipe shape with overlapped belt edges. The material being conveyed is completely enclosed by the belt. Hexagonally arranged idler rolls keep the belt closed over the track. Close to the conveyor head the belt opens out into a normal troughed belt supported by 3-roll idlers and runs flat over the discharge pulley to unload the material. In the return strand the belt closes again into a pipe where its overlapped edges

in general are on the bottom. Hexagon rolls provide the pipe shape also in the return run. At the end of the return strand the belt opens and runs flat over the tail pulley to be loaded again.

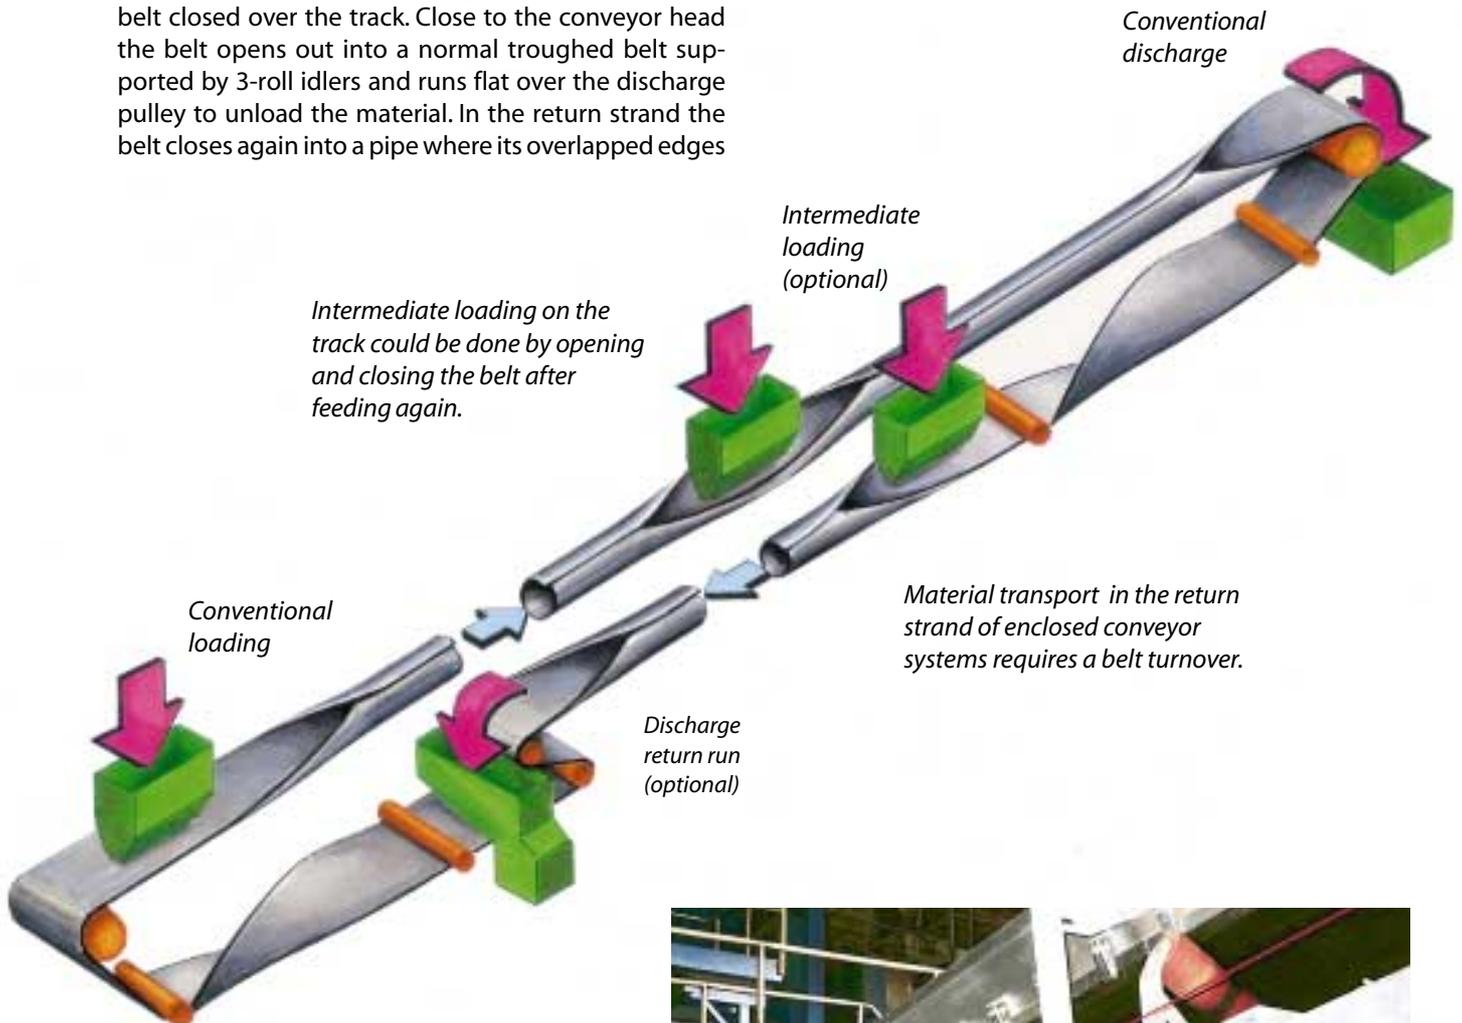

Belt conveyors where only the return strand has a pipe shape, is already a solution to eliminate contamination below the conveyor.



THE FLEXOPIPE® BELT

Conveyor systems for closed material transport are demanding applications with high requirements for

the conveyor belt. Trellex FLEXOPIPE® conveyor belts are specially developed for these systems.

| Characteristic of the system | Requirement for the belt | FLEXOPIPE® solution |
|--|---|--|
| Flexible and adaptive conveyor configuration | <ul style="list-style-type: none"> ❑ Individual belt design for every application ❑ Wide selection of reinforcement types | <ul style="list-style-type: none"> ❑ Tailor-made belt construction with specially developed reinforcements and rubber compounds ❑ Belt types: Steelcord-, Aramid, EP, P |
| Closed belt | <ul style="list-style-type: none"> ❑ Sufficient troughability to fit into hexagon ❑ Tight overlapping | <ul style="list-style-type: none"> ❑ Unique carcass design with adjusted rigidity, more flexible at belt edges to ensure tight overlapping |
| Horizontal and vertical curves | <ul style="list-style-type: none"> ❑ Sufficient elasticity of the reinforcement ❑ Stable pipe shape | <ul style="list-style-type: none"> ❑ Reinforcement with higher lengthwise elasticity for installation with narrow curves ❑ Sufficient crossrigidity to maintain pipe cross-section |
| High dynamic stress | <ul style="list-style-type: none"> ❑ Fatigue resistance of the belt | <ul style="list-style-type: none"> ❑ Rubber compounds with excellent dynamic properties and improved ozone/UV resistance |
| Suitable for all bulk materials | <ul style="list-style-type: none"> ❑ Broad selection of cover grades | <ul style="list-style-type: none"> ❑ Complete range of cover grades: anti-abrasive, heat-, oil- and grease-, flameresistant, food (FDA), etc. |

FLEXOPIPE® Steelcord Belts

FLEXOPIPE® Steelcord belts incorporate additional reinforcements in crosswise direction. Their unique design (patented in EU, US and other countries) is proven in

industry and mining. Please contact Metso Minerals for more information.

FLEXOPIPE® Textile Belts

Depending on the required elasticity, belt strength and rigidity, FLEXOPIPE® belts can be produced with three different textile reinforcements. In short installations with narrow curves an elastic Polyamide (P) fabric is recommended, while with increasing center distances a

Polyester (EP) or Aramid (D or DP) fabric should be used. The nominal pipe diameters as well as belt widths may vary from the values in the table, depending on the OEM's standard.

| Nominal pipe diameter mm | Belt width mm | Fabric types | Belt strength P and EP fabric N/mm | Belt strength D/DP fabric N/mm | Cover thickness | |
|-----------------------------|------------------|--------------|--|--------------------------------------|-----------------|--------------|
| | | | | | top mm | bottom mm |
| 150 | 600 | EP, P | 250-400 | - | 3 | 2 |
| 200 | 780 | EP, P | 250-500 | - | 3 | 2 |
| 250 | 1000 | D, DP, EP, P | 250-630 | 630-1600 | 4 | 2 |
| 300 | 1100 | D, DP, EP, P | 400-1000 | 630-2000 | 4 | 2 |
| 350 | 1300 | D, DP, EP, P | 630-1250 | 630-2500 | 5 | 2 |
| 400 | 1600 | D, DP, EP, P | 1000-2500 | 630-3150 | 5 | 2 |
| 500 | 1900 | D, DP, EP, P | 1000-3150 | 630-3150 | 5 | 3 |

Other belt constructions in different dimensions are already in use and available on request.

Cover Grades

FLEXOPIPE® conveyor belts offer a complete range of rubber covers allowing the usage in the whole field of mining or industrial applications. Enclosed transport of hot material does not allow heat exchange to the atmosphere, therefore material tem-

peratures must be lower than in conventional installations.

The table shows a selection of cover grades. Further cover grades available on request.

| Grade | Characteristics | | Applications (example) | Elastomer | Temperature (material) °C | | | |
|-------------|-----------------|-------|---|----------------------------------|---------------------------|------|-------|-----|
| | ISO | DIN | | | min. | max. | peaks | |
| XP | H | X | anti-abrasive, heavy duty cover for sharp and lumpy material, or extreme drop heights | Ore, rock, limestone | NR / BR | -40 | 50 | |
| Y-30 | D | Y,W | Extremely wear resistant cover, for fine and abrasive material | Cement, gypsum, abrasive sands | NR / BR | -30 | 50 | |
| TXT | L | T,Y | Wear and heat resistant cover for coarse material | Cast iron, coke | SBR | -15 | 100 | 130 |
| RET | | T,C | Anti-abrasive cover with excellent heat resistance | Cement, klinker, ash | EPM | -30 | 150 | 170 |
| GPP | | G | Oil- and grease resistant cover | Wood chips, grain | NBR / SBR | -25 | 50 | |
| S100 | | S,Y | Flame resistant acc. to ISO 340 anti-abrasive | Coal, coke, fertilizer | NR/BR | -25 | 50 | |
| GAK | | G,A,K | White, grease and flame resistant cover, for food (FDA) | Sugar, paper, grain, flour, malt | NBR | -15 | 60 | |


All covers are antistatic




Conveying Capacities and Hexagon Design

Key parameters to select the appropriate pipe diameters are the conveying capacity and lump size. Roll diameters and -lengths are for standard (inline) design of the hexagon. Nominal pipe diameters and belt widths may vary from those values in the table depending on the OEM.

Conventional idler panel of a pipe conveyor with rolls arranged inline. Rolls are mounted with small gaps to avoid the belt edge to be trapped between two rolls.

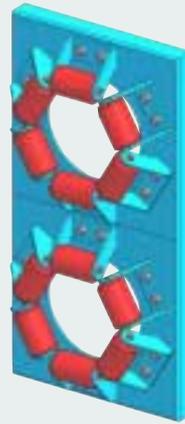

Offset arrangement of idler rolls. This design allows larger rolls and brackets.

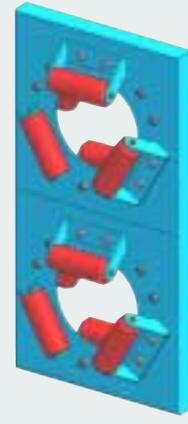

| Nominal pipe diameter mm | Belt width mm | Capacity* m ³ /h | Maximum lump size** mm | Recommended hexagon design | | |
|-----------------------------|------------------|--------------------------------|---------------------------|----------------------------|---------------------|-------------------|
| | | | | roll distance mm | roll diameter mm | roll length mm |
| 150 | 600 | 45 | 50 | 165 | 60.5 | 96 |
| 200 | 780 | 80 | 70 | 217 | 60.5 | 126 |
| 250 | 1000 | 140 | 90 | 285 | 89 | 165 |
| 300 | 1100 | 160 | 100 | 311 | 89 | 180 |
| 350 | 1300 | 220 | 120 | 364 | 89 | 210 |
| 400 | 1600 | 350 | 140 | 457 | 108 | 265 |
| 500 | 1900 | 460 | 180 | 527 | 108 | 305 |

*) Filling rate 75 %, speed 1 m/s **) filling rate 75 %, reduced filling rate allows larger lumps

Conveyor Parameters

The design of the Pipe conveyor should consider the characteristics of the installed conveyor belt. The range of FLEXOPIPE® belts comprises reinforcements with different elastic moduli. A more elastic belt allows narrower curves and shorter transition lengths (distance between

pulley and first regular hexagon panel), but requires more take-up length. The table can be used as guideline for conveyor parameters depending on carcass type and pipe diameter. Please contact Metso for more information.

| Carcass type | Nominal pipe diameter (D) mm | Minimum curve radii Deflection of curve | | | | Transition length | Take-up length % of conveyor length |
|--------------|---------------------------------|--|--------------------|---------------------|----------------------|-------------------|--|
| | | ≤ 25° | 25°-50° | 50°-75° | 75°-100° | | |
| P | 150 - 300 350 - 500 | 300 * D 400 * D | 400 * D 500 * D | 500 * D 600 * D | 600 * D 700 * D | 25 * D | 3 - 4 |
| EP | 150 - 300 350 - 500 | 400 * D 500 * D | 500 * D 600 * D | 600 * D 700 * D | 700 * D 800 * D | 30 * D | 2 - 3 |
| D, DP | 150 - 300 350 - 500 | 500 * D 600 * D | 600 * D 700 * D | 700 * D 800 * D | 800 * D 900 * D | 35 * D | 0.6 - 1.0 |
| ST | 150 - 300 350 - 500 | 700 * D 800 * D | 800 * D 900 * D | 900 * D 1000 * D | 1000 * D 1100 * D | 45 * D | 0.3 - 0.6 |

Trellex Conveyor Belts

Our range:

Aramid conveyor belts
Belts for vertical conveying
Belts with profiled surface
Chemical resistant belts
Cleat belts
Elevator belts
Endless produced belts

Flame resistant belts
Flat transmission belts
FLEXOPIPE® conveyor belts
FLEXOWELL® conveyor belts
Heat resistant belts
Multi-ply textile conveyor belts
Oil and grease resistant belts

Paper roll belts
Plasterboard belts
Process belts
PU belts
PVC belts
Steelcord conveyor belts
Wear resistant belts

Metso Minerals North and Central America

3073 South Chase Avenue
Milwaukee, WI 53207
USA
Phone: +1-414-769 4300
Fax: +1-414-769 4730

Metso Minerals South America

Av. Independência, 2500
Bairro do Éden,
Sorocaba - SP
CEP 18087-050 Brazil
Phone: +55-15-219 1300
Fax: +55-15-219 1699

Metso Minerals Asia-Pacific

P.O. Box 399
West Perth, WA 6872
Australia
Phone: +61-8-9420 5555
Fax: +61-8-9420 5500

Metso Minerals Europe, Middle East and Africa

P.O. Box 4004
20311 Malmö
Sweden
Phone: +46-40-24 58 00
Fax: +46-40-24 58 78

Metso Minerals Kongsvinger

N-2206 Kongsvinger
Norway
Phone: +47 62 88 87 00
Fax: +47 62 88 87 50

www.metsominerals.com

E-mail: minerals.info@metso.com

